


Flexible Circuit Capabilities

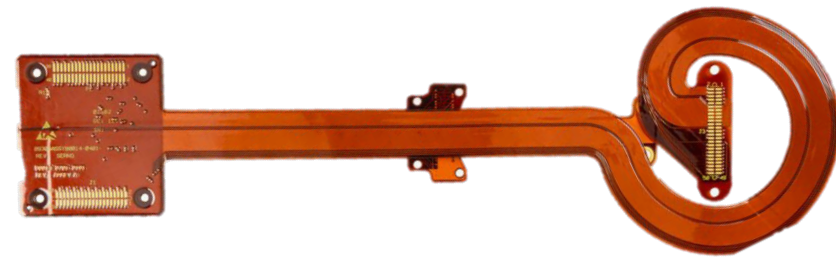

Copper Foils	Single Sided	Double Sided	Multilayer
Layers	1	2	3-8
Maximum Part Size	22" x 40'+	22" x 40'+	22" x 40'+
Minimum Mechanical Drill Size	0.006" [152 μm]	0.006" [152 μm]	0.006" [152 μm]
Micro Via Size (Laser Drill)	n/a	0.002" [51 μm]	0.003" [76 μm]
Blind Vias	n/a	Yes	Yes
Standard Line and Space	0.003" [76 μm]	0.003" [76 μm]	0.003" [76 μm]
Advanced Line and Space	0.002" [51 μm]	0.002" [51 μm]	0.002" [51 μm]
Standard Edge Insulation	0.004" [101 μm]	0.004" [101 μm]	0.004" [101 μm]
Advanced Edge Insulation	0.004" [101 μm]	0.004" [101 μm]	0.004" [101 μm]
Minimum Copper Weight	0.25 oz. [9 μm]	0.25 oz. [9 μm]	0.25 oz. [9 μm]
Maximum Copper Weight	7 oz. [245μm]	7 oz. [245μm]	7 oz. [245μm]